


BF type seal – Blind flange, flush diaphragm

Design description

The BF construction has a seal body that is made of a (forged) blind flange. The weld of the diaphragm to the seal body is a wetted part and therefore diaphragm materials are mostly chosen the same as the flange material. The BF is typically used in combination with (differential) pressure transmitters for applications such as level, flow and (absolute) pressure measurement.

Flange diaphragm combinations

The diaphragm is TIG-welded to the flange and is designed to have the best performance for the specific size. This means that the flexibility and shape is carefully tested and measured. The standard thickness of diaphragm foil is 0.075mm.

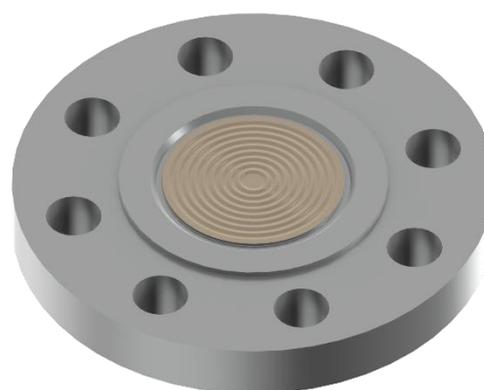

Flange Material	Diaphragm material		
	General name	UNS	Wst.
AISI 316(L)	AISI 316L	S31603	1.4404
	AISI 304L	S30400	1.4306
	AISI 321	S32100	1.4541
	AISI 316 UG	S31603	1.4435
	Alloy C276	N27600	2.4810
AISI 304L	AISI 304L	S30400	1.4306
AISI 310 MoLn	25-22-2 LMN	S31050	1.4466
AISI 316 UG	AISI 316 UG	S31600	1.4435
AISI 321	AISI 321	S32100	1.4541
AISI 904(L)	AISI 904L	N08904	1.4539
Alloy 20	Alloy 20	N08020	2.4660
Alloy 400	Alloy 400	N04400	2.4360
Alloy 600	Alloy 600	N06600	2.4816
Alloy 625	Alloy 625	N06625	2.4856
Alloy 825	Alloy 825	N08825	2.4858
Alloy B2	Alloy B2	N10665	2.4617
Alloy C-22	Alloy C-22	N06022	2.4602
Alloy C-276	Alloy C-276	N10276	2.4810
Duplex F44	254 SMO (6Mo)	S31254	1.4547
Duplex F51/F60	Duplex 2205	S32205	1.4462
Duplex F53	Super Duplex 2507	S32750	1.4410
Duplex F55	Super Duplex 2507	S32750	1.4410
Nickel 201	Nickel 201	N02201	2.4068
Titanium Gr. 2	Titanium Gr. 1	R50250	2.7025
Zirconium 702	Zirconium 702	R60702	-

Flange standard, size, rating and facings

ASME B16.5			
Size	Rating	Facing	Roughness
1" to 4"	cl. 150 - cl. 2500	RF, LMF, FF, SGF	Ra 3.2-6.3 µm
		RJF, SFF	Ra <1.6 µm
		SMF, LTF, STF, LGF, LFF	Ra <3.2 µm

EN 1092-1			
Size	Rating	Type	Roughness
DN20 to DN100	PN10-400	A, B1, E, F	Ra 3.2-12.5 µm
		B2, C, D, G, H	Ra <0.8-3.2 µm

API ISO 10423			
Size	Rating	Facing	Roughness
1-13/16" to 3-1/16"	69 – 138 MPa	6BX – RJF	Ra <1.6 µm
2-1/16" to 3-1/8"	13.8 – 34.5 MPa	6B-RJF	Ra <1.6 µm

JIS B2220			
Size	Rating	Type	Roughness
DN25 to DN100	10-20K	RF	Ra 3.2-12.5 µm

GOST 33259			
Size	Rating	Type	Roughness
DN20 to DN100	PN10-250	A, B, C, D E, F	Ra 3.2-12.5 µm
		L, M	Ra <0.8-3.2 µm
		J	Ra <1.6 µm

Gold coatings

Several types of gold coating can be applied on the seals. The selection possibilities are:

- 25 µm chemical resistance (diaphragm + facing)
- 40 µm chemical resistance (diaphragm + facing)
- 25 µm Hydrogen protection (diaphragm only)
- 40 µm Hydrogen protection (diaphragm only)

-> See datasheet "Gold coatings"

Polymer coatings

Polymer coatings come in several types. The technical data on thickness and temperature limitation can be found in datasheet "polymer solutions" The applicable selection on BF seals are:

- PTFE coating
- ECTFE (Halar®) coating
- PFA coating
- FEP coating
- PTFE sheet

-> See datasheet "Polymer solutions"

Capillary tube and armor (protection)

The standard capillary mounting position is top side (axial) of the seal. Alternatively, the capillary can be placed at the side of the seal (radial). The standard tube material is TP316 (316SS), optionally available in Alloy 400. There are three options in ID of the capillary; 2mm, 1mm, and 0.7mm. Badotherm capillaries are always protected against mechanical forces by armor. This doubled shielded armor consist is standard AISI 304, and optionally AISI 316. Additionally, the armor could be protected with a PVC sleeve in white, black, optionally with ATEX114 approval to protect against dust and water ingress and possibly corrosive ambient atmosphere.

-> See datasheet "Capillary lines"

Flush rings and flush flanges

Badotherm offers matching flush rings or flush flanges to their diaphragm seal. On request equipped with blind plugs, vent plug and or flushing / draining needle valves, which can be fitted or welded to the complete construction.

-> See datasheet flush rings

-> See datasheet flush flanges

Cooling options

There are several ways to protect the instrument from elevated temperatures, such as the extended direct mount (EDM), a temperature reducer (TR) or by means of capillary.

-> See datasheet "cooling devices"

Lifting handles

Larger sizes and ratings of diaphragm seals can weigh up to 50 kg. Handling and installation can become a challenge. As from 15kg it is recommended to apply a set of lifting handles, welded on the sides of the flange of the seal. This can be used to handle it easier and install it in a safer way or have attach lifting tools to it.

-> See datasheet "diaphragm seal accessories"

Material Certification

Material traceability and related certification are applicable for all process wetted parts. Material certification possibilities depend on the type of seal, the assembly construction and the materials used. Material certification is in accordance with EN10204 3.1.

Additional material certification and testing can be provided on request, such as Positive Material Identification (PMI), Intergranular corrosion (IGC) testing, material certification in accordance with EN10204 3.2, NACE conformity for ISO-15156 (MR-0175) and/or ISO-17945 (MR-0103), NORSOK M-630 and many more.

-> Please note that the responsibility for material selection always rests with the user.

Flange Marking & Traceability

All flanges are marked by the forging shop with heat number, material designation, size, and rating. Badotherm adds a Badotherm reference number and the manufacturers name to the flange for traceability purposes.

Flanges and origin

The seal parts are made from forged materials according to the applicable standards. The standard sourcing of flanges is of international origin. Optionally regional preference can be requested, for example materials from EU origin.

Testing

All seals are helium tested according the EN 13185 test procedure A.3 up to 10⁻⁹ mbar l/s before used on a diaphragm seal application.

-> See datasheet "Diaphragm Seal testing"

Cleanliness of the wetted parts

All parts are standard cleaned from excessive oil and grease. When additional requirements are needed, the parts can be cleaned according customer requirements and cleaning specifications.

Gaskets

Sizes of the diaphragm area are designed to match the gaskets used between the process and seal or flush ring. For the ASME B16.5 RF flanges the ASME B16.20 is used for dimension restriction to ensure both the spiral and grooved gaskets are fully supported by the serrated area. For the EN type B1 flanges the gasket dimensions are matching the sizes of the EN 1514-2. The size "G" in the tables refer to the start of the gasket surface.

Example performance calculation - Basecal

Whether a diaphragm seal can be used for a specific measurement, depends on the size of the diaphragm. That size is restricted by the size of the diaphragm seal.

For pressure transmitters, Badotherm offers an online performance calculation tool to calculate its performance and to ensure that the diaphragm size is suitable for your measurement.

The table below presents the minimum span of the respective diaphragm sizes with standard process conditions. As rule of thumb, a TPE of max 5% is often considered acceptable, but it depends per situation.


Minimum span table

dD	AP/GP	DP
23.5mm	17.5 bar	na
32mm	11 bar	1850 mbar
44mm	1575 mbar	255 mbar
57mm	415 mbar	70 mbar
72mm	155 mbar	30 mbar
81mm	110 mbar	20 mbar

Pressure transmitter; ambient temperature -10...+30°C; process temperature 100°C with BSO 22 fill fluid; 3 meter capillary; ID 1mm, DP both sides mounted with seal

See the general overview of all diaphragm sizes with several standard situations and in combination with Badotherm pressure gauges.


Dimensions table: ASME 16.5 RF facing

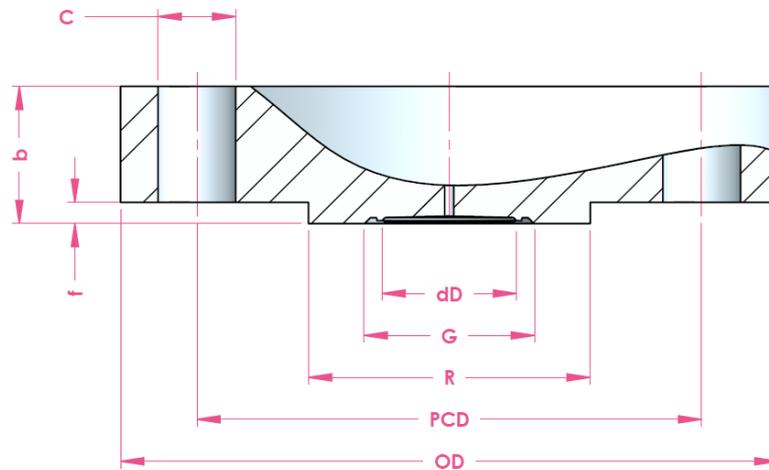

size	rating	OD	b	PCD	C / pcs	dD	R	f	G	weight		
1"	cl. 150	110.0	14.7	79.4	15.9 / 4x	23.5	50.8	2.0	31.8	0.9		
	cl. 300	125.0	17.9	88.9	19.1 / 4x					1.4		
	cl. 400-600		24.5					1.6				
	cl. 900-1500	150.0	35.6	101.6	25.4 / 4x			7.0		3.6		
	cl. 2500	160.0	42.0	108.0						5.0		
1.25"	cl. 150	115.0	17.9	88.9	15.9 / 4x	32.0	63.5	2.0	41.5	1.2		
	cl. 300	135.0	19.5	98.4	19.1 / 4x					1.8		
	cl. 400-600		27.7					2.2				
	cl. 900-1500	160.0	35.6	111.1	25.4 / 4x			7.0		39.8	4.1	
	cl. 2500	185.0	45.1	130.2							28.6 / 4x	7.4
1.5"	cl. 150	125.0	17.9	98.4	15.9 / 4x	44.0	73.0	2.0	52.4	1.5		
	cl. 300	155.0	21.1	114.3	22.3 / 4x					2.7		
	cl. 400-600		29.3					3.3				
	cl. 900-1500	180.0	38.8	123.8	28.6 / 4x			7.0		41.5	5.8	
	cl. 2500	205.0	51.5	146.0							31.8 / 4x	10.4
2"	cl. 150	150.0	19.5	120.7	19.1 / 4x	57.0	92.1	2.0	70.2	2.4		
	cl. 300	165.0	22.7	127.0	19.1 / 8x					3.2		
	cl. 400-600		32.4					4.2				
	cl. 900-1500	215.0	45.1	165.1	25.4 / 8x			44.0		7.0	55.4	10.1
	cl. 2500	235.0	57.9	171.4								28.6 / 8x
3"	cl. 150	190.0	24.3	152.4	19.1 / 4x	81.0	127.0	2.0	93.0	4.9		
	cl. 300	210.0	29.0	168.3	22.3 / 8x					6.8		
	cl. 400-600		38.8					8.4				
	cl. 900	240.0	45.1	190.5	25.4 / 8x			7.0		13.1		
	cl. 1500	265.0	54.7	203.2							31.9 / 8x	19.1
	cl. 2500	305.0	73.7	228.6	35.0 / 8x			34.8				
4"	cl. 150	230.0	24.3	190.5	19.1 / 8x	157.2	157.2	2.0	93.0	7.0		
	cl. 300	255.0	32.2	200.0	22.3 / 8x					11.5		
	cl. 400		42.0					14.8				
	cl. 600	275.0	45.1	215.9	25.5 / 8x			7.0		17.3		
	cl. 900	290.0	51.5	235.0							31.8 / 8x	26.9
	cl. 1500	310.0	61.0	241.3	34.9 / 8x			29.9				
cl. 2500	355.0	83.2	273.0	41.3 / 8x	53.9							

All dimensions in mm, weight in kg


Dimensions table: ASME 16.5 RJF facing

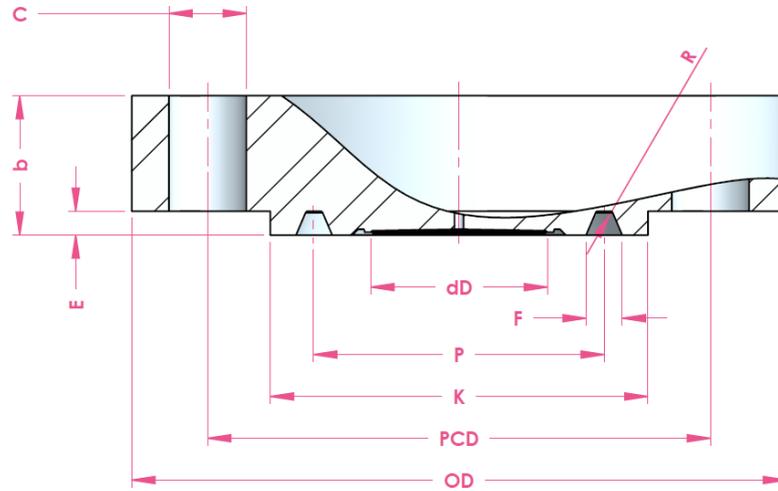

size	rating	OD	b	PCD	C/pcs	dD	K	E	F	P	R	Ring #	Weight	
1"	cl. 150	110.0	19.1	79.4	15.9 / 4x	32.0	63.5	6.35	8.74	47.63	0.8	15	0.9	
	cl. 300	125.0	22.3	88.9	19.1 / 4x		70.0			50.80		16	1.4	
	cl. 400-600		23.9	88.9			71.5			60.33		18	1.6	
	cl. 900-1500	150.0	35.0	101.6	25.4 / 4x		82.5			60.33		18	3.6	
	cl. 2500	160.0	41.4	108.0	25.4 / 4x		73.0			57.15		17	5.0	
1.25"	cl. 150	115.0	22.3	88.9	15.9 / 4x	44.0	79.5	7.92	11.91	60.33	0.8	17	1.2	
	cl. 300	135.0	23.9	98.4	19.1 / 4x		81.0			60.33		18	1.8	
	cl. 400-600		27.1	98.4			102.0			72.23		21	2.2	
	cl. 900-1500	160.0	35.0	111.1	25.4 / 4x		92.0			72.23		21	4.1	
	cl. 2500	185.0	46.0	130.2	28.6 / 4x		114.0			72.23		21	7.4	
1.5"	cl. 150	125.0	22.3	98.4	15.9 / 4x	57.0	82.5	7.92	11.91	65.07	0.8	19	1.5	
	cl. 300	155.0	25.5	114.3	22.3 / 4x		90.5			68.27		20	2.7	
	cl. 400-600		28.7	114.3			92.0			68.27		20	3.3	
	cl. 900-1500	180.0	38.2	123.8	28.6 / 4x		114.0			72.23		21	5.8	
	cl. 2500	205.0	52.4	146.0	31.8 / 4x		133.0			101.60		26	10.4	
2"	cl. 150	150.0	23.9	120.7	19.1 / 8x	81.0	102.0	6.35	8.74	82.55	1.5	22	2.4	
	cl. 300	165.0	28.6	127.0			108.0			82.55		23	3.2	
	cl. 400-600		33.3	127.0	19.1 / 8x		7.92			11.91		95.25	24	4.2
	cl. 900-1500	215.0	46.0	165.1	25.4 / 8x		124.0			101.60		26	10.1	
	cl. 2500	235.0	58.8	171.4	28.6 / 8x		133.0			101.60		26	15.6	
3"	cl. 150	190.0	28.7	152.4	19.1 / 4x	81.0	146.0	7.92	11.91	114.30	0.8	29	4.9	
	cl. 300	210.0	34.9	168.3	22.3 / 8x		146.0			123.83		31	6.8	
	cl. 400-600		39.7	168.3			156.0			123.83		31	8.4	
	cl. 900	240.0	46.0	190.5	25.4 / 8x		168.0			127.00		32	13.1	
	cl. 1500	265.0	55.6	203.2	31.8 / 8x		171.0			127.00		32	19.1	
4"	cl. 2500	305.0	76.2	228.6	34.9 / 8x	81.0	175.0	9.53	13.49	127.00	1.5	35	34.8	
	cl. 150	230.0	28.7	190.5	19.1 / 8x		171.0			8.74		149.23	36	7.0
	cl. 300	255.0	38.1	200.0	22.3 / 8x		175.0			8.74		149.23	37	11.5
	cl. 400		42.9	200.0			181.0			149.23		17.3		
	cl. 600	275.0	46.0	215.9	25.4 / 8x		181.0			11.91		149.23	37	26.9
	cl. 900	290.0	52.4	235.0	31.8 / 8x		194.0			11.91		161.93	39	29.9
	cl. 1500	310.0	61.9	241.3	34.9 / 8x		203.0			11.13		16.66	157.18	38
cl. 2500	355.0	87.3	273.0	41.3 / 8x										

All dimensions in mm, weight in kg


Dimensions table: ASME 16.5 STF facing

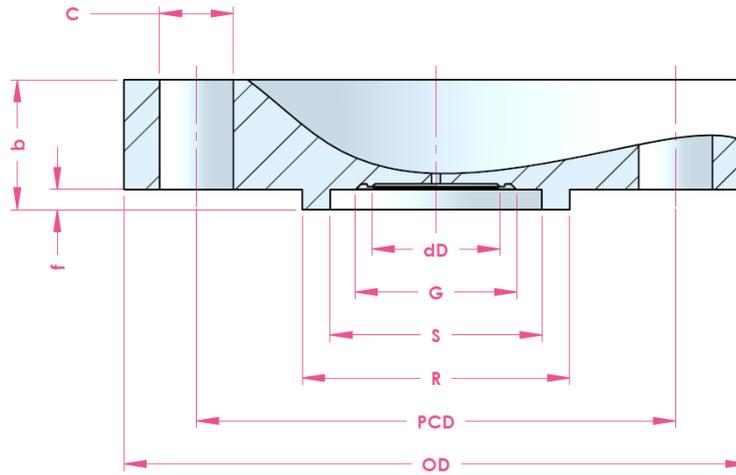

size	rating	OD	b	PCD	C / pcs	dD	G	S	R	f	weight
1"	cl. 150	110.0	14.7	79.4	15.9 / 4x	23.5	31.8	38.1	47.8	7.0	0.9
	cl. 300	125.0	17.9	88.9	19.1 / 4x						1.4
	cl. 400-600		24.5								1.6
	cl. 900-1500	150.0	35.6	101.6	25.4 / 4x						3.6
	cl. 2500	160.0	42.0	108.0							5.0
1.25"	cl. 150	115.0	17.9	88.9	15.9 / 4x	32.0	41.5	47.6	57.2		1.2
	cl. 300	135.0	19.5	98.4	19.1 / 4x						1.8
	cl. 400-600		27.7								2.2
	cl. 900-1500	160.0	35.6	111.1	25.4 / 4x						4.1
	cl. 2500	185.0	45.1	130.2	28.6 / 4x						7.4
1.5"	cl. 150	125.0	17.9	98.4	15.9 / 4x	44.0	52.4	73.0	82.6		1.5
	cl. 300	155.0	21.1	114.3	22.3 / 4x					2.7	
	cl. 400-600		29.3							3.3	
	cl. 900-1500	180.0	38.8	123.8	28.6 / 4x					5.8	
	cl. 2500	205.0	51.5	146.0	31.8 / 4x					10.4	
2"	cl. 150	150.0	19.5	120.7	19.1 / 4x	81.0	93.0	108.0	117.5	2.4	
	cl. 300	165.0	22.7	127.0	19.1 / 8x					3.2	
	cl. 400-600		32.4							4.2	
	cl. 900-1500	215.0	45.1	165.1	25.4 / 8x					10.1	
	cl. 2500	235.0	57.9	171.4	28.6 / 8x					15.6	
3"	cl. 150	190.0	24.3	152.4	19.1 / 4x	131.8	144.5	131.8	144.5	4.9	
	cl. 300	210.0	29.0	168.3	22.3 / 8x					6.8	
	cl. 400-600		38.8							8.4	
	cl. 900	240.0	45.1	190.5	25.4 / 8x					13.1	
	cl. 1500	265.0	54.7	203.2	31.9 / 8x					19.1	
4"	cl. 2500	305.0	73.7	228.6	35.0 / 8x	25.5 / 8x	131.8	144.5	144.5	34.8	
	cl. 150	230.0	24.3	190.5	19.1 / 8x					7.0	
	cl. 300	255.0	32.2	200.0	22.3 / 8x					11.5	
	cl. 400		42.0							14.8	
	cl. 600	275.0	45.1	215.9	25.5 / 8x					17.3	
	cl. 900	290.0	51.5	235.0	31.8 / 8x					26.9	
	cl. 1500	310.0	61.0	241.3	34.9 / 8x					29.9	
cl. 2500	355.0	83.2	273.0	41.3 / 8x	53.9						

All dimensions in mm, weight in kg


Dimensions table: ASME 16.5 LTF facing

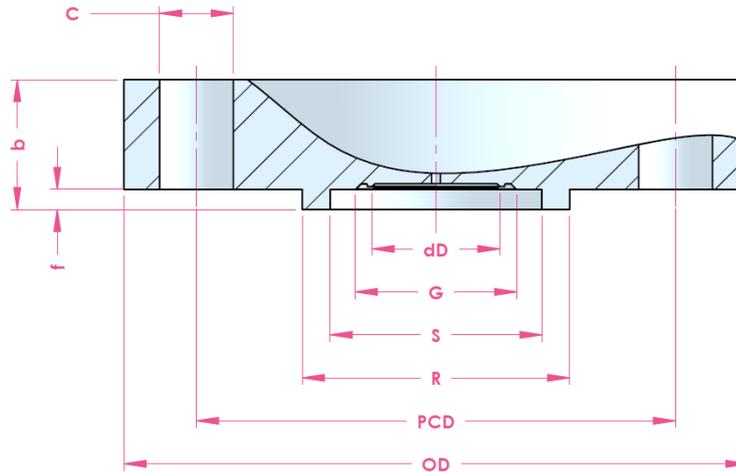

size	rating	OD	b	PCD	C / pcs	dD	G	S	R	f	weight
1"	cl. 300	125.0	17.9	88.9	19.1 / 4x	23.5	31.8	38.1	50.8	7.0	1.4
	cl. 400-600		24.5								1.6
	cl. 900-1500	150.0	35.6	101.6	25.4 / 4x						3.6
	cl. 2500	160.0	42.0	108.0							5.0
1.25"	cl. 300	135.0	19.5	98.4	19.1 / 4x	32.0	41.5	47.6	63.5		1.8
	cl. 400-600		27.7								2.2
	cl. 900-1500	160.0	35.6	111.1	25.4 / 4x						4.1
	cl. 2500	185.0	45.1	130.2							7.4
1.5"	cl. 300	155.0	21.1	114.3	22.3 / 4x	44.0	52.4	54.0	73.0		2.7
	cl. 400-600		29.3								3.3
	cl. 900-1500	180.0	38.8	123.8	28.6 / 4x						5.8
	cl. 2500	205.0	51.5	146.0							10.4
2"	cl. 300	165.0	22.7	127.0	19.1 / 8x	57.0	70.2	73.0	92.1	3.2	
	cl. 400-600		32.4							4.2	
	cl. 900-1500	215.0	45.1	165.1	25.4 / 8x					10.1	
	cl. 2500	235.0	57.9	171.4						28.6 / 8x	15.6
3"	cl. 300	210.0	29.0	168.3	22.3 / 8x	81.0	93.0	108.0	127.0	6.8	
	cl. 400-600		38.8							8.4	
	cl. 900	240.0	45.1	190.5	25.4 / 8x					13.1	
	cl. 1500	265.0	54.7	203.2				31.9 / 8x	19.1		
	cl. 2500	305.0	73.7	228.6	35.0 / 8x			34.8			
4"	cl. 300	255.0	32.2	200.0	22.3 / 8x	81.0	93.0	131.8	157.2	11.5	
	cl. 400		42.0							14.8	
	cl. 600	275.0	45.1	215.9	25.5 / 8x					17.3	
	cl. 900	290.0	51.5	235.0				31.8 / 8x	26.9		
	cl. 1500	310.0	61.0	241.3	34.9 / 8x			29.9			
	cl. 2500	355.0	83.2	273.0	41.3 / 8x			53.9			

All dimensions in mm, weight in kg
 Large tongue faces are not applicable to Class 150 because of potential dimensional conflicts.


Dimensions table: ASME 16.5 LGF facing

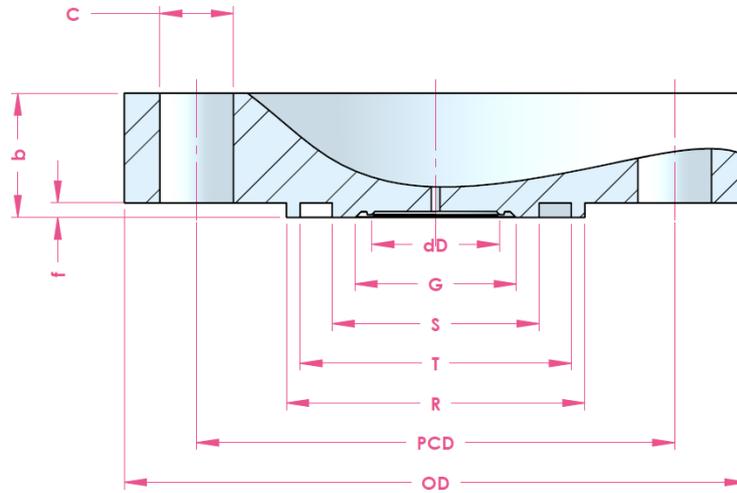

size	rating	OD	b	PCD	C / pcs	dD	G	S	T	R	f	weight	
1"	cl. 300	125.0	20.9	88.9	19.1 / 4x	23.5	31.8	36.5	52.4	62.0	5.0	1.4	
	cl. 400-600		22.5									1.6	
	cl. 900-1500	150.0	33.6		101.6							25.4 / 4x	3.6
	cl. 2500	160.0	40.0		108.0								5.0
1.25"	cl. 300	135.0	22.5	98.4	19.1 / 4x	32.0	41.5	46.0	55.1	75.0		1.8	
	cl. 400-600		25.7									2.2	
	cl. 900-1500	160.0	33.6		111.1							25.4 / 4x	4.1
	cl. 2500	185.0	43.1		130.2							28.6 / 4x	7.4
1.5"	cl. 300	155.0	24.1	114.3	22.3 / 4x	44.0	52.4	52.4	74.6	84.0		2.7	
	cl. 400-600		27.3									3.3	
	cl. 900-1500	180.0	36.8		123.8							28.6 / 4x	5.8
	cl. 2500	205.0	49.5		146.0							31.8 / 4x	10.4
2"	cl. 300	165.0	25.7	127.0	19.1 / 8x	57.0	70.2	71.4	93.7	103.0	3.2		
	cl. 400-600		30.4								4.2		
	cl. 900-1500	215.0	43.1		165.1						25.4 / 8x	10.1	
	cl. 2500	235.0	55.9		171.4						28.6 / 8x	15.6	
3"	cl. 300	210.0	32.0	168.3	22.3 / 8x	81.0	93.0	106.4	128.6	138.0	6.8		
	cl. 400-600		36.8								8.4		
	cl. 900	240.0	45.1		190.5			25.4 / 8x	13.1				
	cl. 1500	265.0	52.7		203.2			31.9 / 8x	19.1				
4"	cl. 2500	305.0	71.7	228.6	35.0 / 8x	34.8							
	cl. 300	255.0	35.2	200.0	22.3 / 8x	81.0	93.0	130.2	158.8	168.0	11.5		
	cl. 400		40.0		14.8								
	cl. 600	275.0	43.1	215.9	25.5 / 8x						17.3		
	cl. 900	290.0	49.5	235.0	31.8 / 8x						26.9		
	cl. 1500	310.0	59.0	241.3	34.9 / 8x						29.9		
cl. 2500	355.0	81.2	273.0	41.3 / 8x	53.9								

All dimensions in mm, weight in kg
 Large groove faces are not applicable to Class 150 because of potential dimensional conflicts.


Dimensions table: ASME 16.5 SGF facing

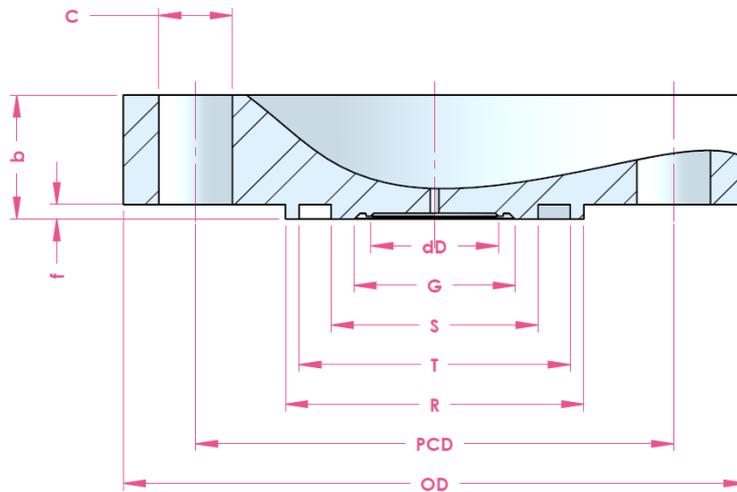

size	rating	OD	b	PCD	C / pcs	dD	G	S	R	f	weight
1"	cl. 150	110.0	17.7	79.4	15.9 / 4x	23.5	31.8	36.5	57.0	5.0	0.9
	cl. 300	125.0	20.9	88.9	19.1 / 4x						1.4
	cl. 400-600		24.5		1.6						
	cl. 900-1500	150.0	35.6	101.6	25.4 / 4x						3.6
cl. 2500	160.0	42.0	108.0	5.0							
1.25"	cl. 150	115.0	20.9	88.9	15.9 / 4x	32.0	41.5	46.0	67.0		1.2
	cl. 300	135.0	22.5	98.4	19.1 / 4x						1.8
	cl. 400-600		27.7		2.2						
	cl. 900-1500	160.0	35.6	111.1	25.4 / 4x						4.1
cl. 2500	185.0	45.1	130.2	28.6 / 4x		7.4					
1.5"	cl. 150	125.0	20.9	98.4	15.9 / 4x	32.0	41.5	52.4	73.0		1.5
	cl. 300	155.0	24.1	114.3	22.3 / 4x						2.7
	cl. 400-600		29.3		3.3						
	cl. 900-1500	180.0	38.8	123.8	28.6 / 4x					5.8	
cl. 2500	205.0	51.5	146.0	31.8 / 4x		10.4					
2"	cl. 150	150.0	22.5	120.7	19.1 / 4x	44.0	55.4	71.4	92.0	2.4	
	cl. 300	165.0	25.7	127.0	19.1 / 8x					3.2	
	cl. 400-600		32.4		4.2						
	cl. 900-1500	215.0	45.1	165.1	25.4 / 8x					10.1	
cl. 2500	235.0	57.9	171.4	28.6 / 8x		15.6					
3"	cl. 150	190.0	27.3	152.4	19.1 / 4x	81.0	93.0	106.4	127.0	4.9	
	cl. 300	210.0	32.0	168.3	22.3 / 8x					6.8	
	cl. 400-600		38.8		8.4						
	cl. 900	240.0	45.1	190.5	25.4 / 8x					13.1	
cl. 1500	265.0	54.7	203.2	31.9 / 8x		19.1					
4"	cl. 2500	305.0	73.7	228.6	35.0 / 8x	81.0	93.0	130.2	157.0	34.8	
	cl. 150	230.0	27.3	190.5	19.1 / 8x					7.0	
	cl. 300	255.0	35.2	200.0	22.3 / 8x					11.5	
	cl. 400		42.0		14.8						
	cl. 600	275.0	45.1	215.9	25.5 / 8x					17.3	
	cl. 900	290.0	51.5	235.0						31.8 / 8x	26.9
cl. 1500	310.0	61.0	241.3	34.9 / 8x	29.9						
cl. 2500	355.0	83.2	273.0	41.3 / 8x	53.9						

All dimensions in mm, weight in kg


Dimensions table: ASME 16.5 LMF facing

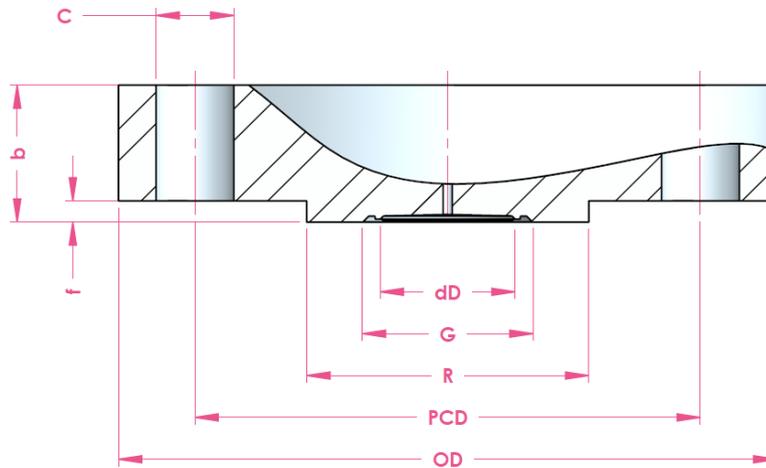

size	rating	OD	b	PCD	C / pcs	dD	G	R	f	weight	
1"	cl. 300	125.0	22.9	88.9	19.1 / 4x	23.5	31.8	50.8	7.0	1.4	
	cl. 400-600		24.5							1.6	
	cl. 900-1500	150.0	35.6	101.6	25.4 / 4x					3.6	
	cl. 2500	160.0	42.0	108.0						5.0	
1.25"	cl. 300	135.0	24.5	98.4	19.1 / 4x	32.0	41.5	63.5		1.8	
	cl. 400-600		27.7				2.2				
	cl. 900-1500	160.0	35.6	111.1	25.4 / 4x		39.8	4.1			
	cl. 2500	185.0	45.1	130.2	28.6 / 4x		7.4				
1.5"	cl. 300	155.0	26.1	114.3	22.3 / 4x	44.0	52.4	73.0		2.7	
	cl. 400-600		29.3							3.3	
	cl. 900-1500	180.0	38.8	123.8	28.6 / 4x					5.8	
	cl. 2500	205.0	51.5	146.0	31.8 / 4x					10.4	
2"	cl. 300	165.0	27.7	127.0	19.1 / 8x	57.0	70.2	92.1	3.2		
	cl. 400-600		32.4						4.2		
	cl. 900-1500	215.0	45.1	165.1	25.4 / 8x				10.1		
	cl. 2500	235.0	57.9	171.4	28.6 / 8x				15.6		
3"	cl. 300	210.0	34.0	168.3	22.3 / 8x	81.0	93.0	127.0	6.8		
	cl. 400-600		38.8						8.4		
	cl. 900	240.0	45.1	190.5	25.4 / 8x				13.1		
	cl. 1500	265.0	54.7	203.2	31.9 / 8x				19.1		
	cl. 2500	305.0	73.7	228.6	35.0 / 8x				34.8		
4"	cl. 300	255.0	37.2	200.0	22.3 / 8x			81.0	93.0	157.2	11.5
	cl. 400		42.0								14.8
	cl. 600	275.0	45.1	215.9	25.5 / 8x						17.3
	cl. 900	290.0	51.5	235.0	31.8 / 8x						26.9
	cl. 1500	310.0	61.0	241.3	34.9 / 8x						29.9
	cl. 2500	355.0	83.2	273.0	41.3 / 8x	53.9					

All dimensions in mm, weight in kg
 Large male faces are not applicable to Class 150 because of potential dimensional conflicts.


Dimensions table: ASME 16.5 FF facing

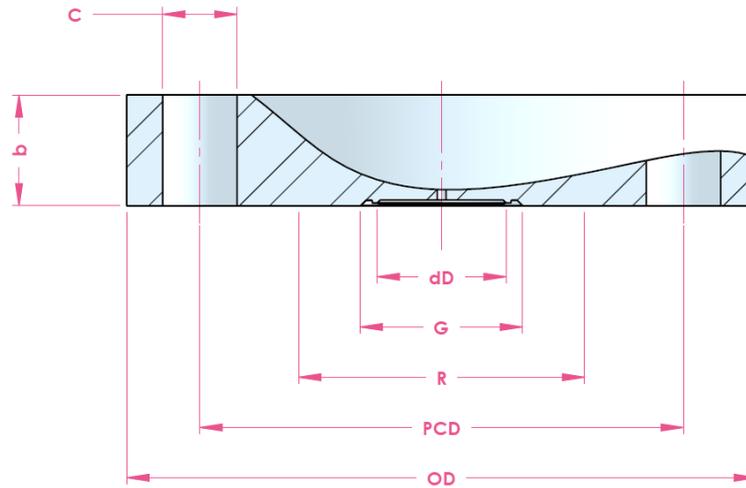

size	rating	OD	b	PCD	C / pcs	dD	G	R ^{*1}	G	weight		
1"	cl. 150	110.0	12.7	79.4	15.9 / 4x	23.5	31.8	50.8	31.8	0.9		
	cl. 300	125.0	15.9	88.9	19.1 / 4x					1.4		
	cl. 400-600		17.5							1.6		
	cl. 900-1500	150.0	28.6	101.6	25.4 / 4x					3.6		
	cl. 2500	160.0	45.0	108.0						5.0		
1.25"	cl. 150	115.0	15.9	88.9	15.9 / 4x	32.0	41.5	63.5	41.5	1.2		
	cl. 300	135.0	17.5	98.4	19.1 / 4x					1.8		
	cl. 400-600		20.7							2.2		
	cl. 900-1500	160.0	28.6	111.1	25.4 / 4x				39.8	4.1		
	cl. 2500	185.0	38.1	130.2						28.6 / 4x	7.4	
1.5"	cl. 150	125.0	15.9	98.4	15.9 / 4x	44.0	52.4	73.0	52.4	1.5		
	cl. 300	155.0	19.1	114.3	22.3 / 4x					2.7		
	cl. 400-600		22.3							3.3		
	cl. 900-1500	180.0	31.8	123.8	28.6 / 4x				41.5	41.5	5.8	
	cl. 2500	205.0	44.5	146.0							31.8 / 4x	10.4
2"	cl. 150	150.0	17.5	120.7	19.1 / 4x	57.0	70.2	92.1	70.2	2.4		
	cl. 300	165.0	20.7	127.0	19.1 / 8x					3.2		
	cl. 400-600		25.4							4.2		
	cl. 900-1500	215.0	35.1	165.1	25.4 / 8x				44.0	52.4	55.4	10.1
	cl. 2500	235.0	50.9	171.4								28.6 / 8x
3"	cl. 150	190.0	22.3	152.4	19.1 / 4x	81.0	93.0	127.0	93.0	4.9		
	cl. 300	210.0	27.0	168.3	22.3 / 8x					6.8		
	cl. 400-600		31.8							8.4		
	cl. 900	240.0	38.1	190.5	25.4 / 8x					19.1 / 8x	13.1	
	cl. 1500	265.0	47.7	203.2								31.9 / 8x
	cl. 2500	305.0	66.7	228.6	35.0 / 8x					34.8		
4"	cl. 150	230.0	22.3	190.5	19.1 / 8x	81.0	93.0	157.2	93.0	7.0		
	cl. 300	255.0	30.2	200.0	22.3 / 8x					11.5		
	cl. 400		45.0							14.8		
	cl. 600	275.0	38.1	215.9	25.5 / 8x					19.1 / 8x	17.3	
	cl. 900	290.0	44.5	235.0								31.8 / 8x
	cl. 1500	310.0	54.0	241.3	34.9 / 8x					29.9		
cl. 2500	355.0	76.2	273.0	41.3 / 8x	53.9							

All dimensions in mm, weight in kg
^{*1}: Dimension R is the end of the gasket roughness area


Dimensions table: EN 1092-1 type B1/B2: Raised face

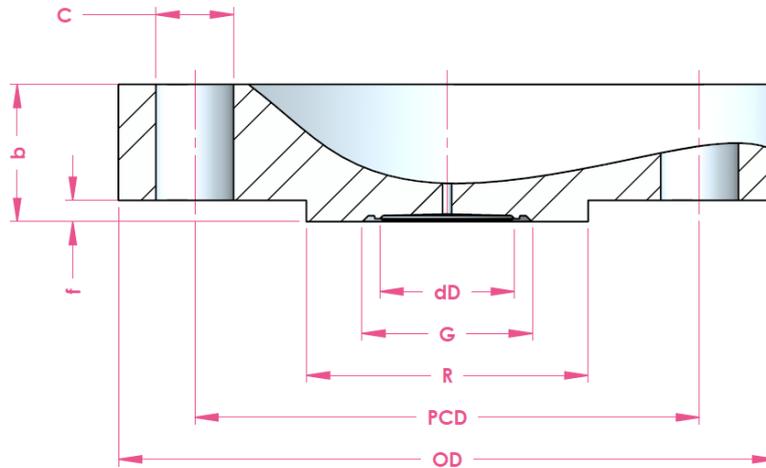

size	rating	OD	b	PCD	C / pcs	dD	R	f	G	Weight
DN20	PN10-40	105.0	18.0	75.0	14.0 / 4x	23.0	58.0	2.0	33.8	1.0
	PN63-100	130.0	22.0	90.0	18.0 / 4x					2.0
DN25	PN10-40	115.0	18.0	85.0	14.0 / 4x	32.0	68.0	2.0	41.0	1.0
	PN63-100	140.0	24.0	100.0	18.0 / 4x					2.5
	PN160		28.0	105.0	22.0 / 4x					2.7
	PN250	150.0	34.0	115.0	26.0 / 4x					3.6
	PN320	160.0	38.0	130.0						5.2
	PN400	180.0	18.0	100.0	18.0 / 4x					7.5
DN32	PN10-40	140.0	18.0	110.0	18.0 / 4x	32.0	78.0	2.0	41.5	2.0
	PN63-100	155.0	24.0	125.0	22.0 / 4x					3.0
DN40	PN10-40	150.0	18.0	125.0	18.0 / 4x	44.0	88.0	3.0	55.4	2.0
	PN63-100	170.0	26.0	135.0	22.0 / 4x					4.0
	PN160		28.0	145.0	26.0 / 4x					4.4
	PN250	185.0	34.0	165.0						30.0 / 4x
	PN320	195.0	38.0	180.0	30.0 / 8x					8.7
	PN400	220.0	48.0	180.0	30.0 / 8x					14.1
DN50	PN10-40	165.0	20.0	135.0	18.0 / 4x	57.0	102.0	3.0	70.2	3.0
	PN63	180.0	26.0	145.0	22.0 / 4x					4.5
	PN100	195.0	28.0	150.0	26.0 / 4x					6.0
	PN160		30.0	160.0	26.0 / 8x					6.4
	PN250	200.0	38.0	180.0						30.0 / 8x
	PN320	210.0	42.0	180.0	30.0 / 8x					10.7
	PN400	235.0	52.0	180.0	30.0 / 8x					16.7
DN80	PN10-40	200.0	24.0	170.0	18.0 / 8x	81.0	138.0	3.0	93.0	5.0
	PN63	215.0	28.0	180.0	22.0 / 8x					6.5
	PN100	230.0	32.0	180.0	26.0 / 8x					9.0
	PN160	230.0	36.0	200.0	30.0 / 8x					10.3
	PN250	255.0	46.0	220.0						16.5
	PN320	275.0	55.0	240.0	33.0 / 8x					25.4
	PN400	305.0	68.0	240.0	33.0 / 8x					38.4
DN100	PN10-16	220.0	20.0	180.0	18.0 / 8x	81.0	158.0	3.0	93.0	4.5
	PN25-40	235.0	24.0	190.0	22.0 / 8x		6.5			
	PN63	250.0	30.0	200.0	26.0 / 8x		9.0			
	PN100	265.0	36.0	210.0	30.0 / 8x		13.0			
	PN160		40.0	235.0	33.0 / 8x		15.3			
	PN250	300.0	54.0	265.0	36.0 / 8x		27.2			
	PN320	335.0	65.0	265.0	36.0 / 8x		42.5			
	PN400	370.0	80.0	295.0	39.0 / 8x		67.3			

All dimensions in mm, weight in kg


Dimensions table: EN 1092-1 type A: Flat Face

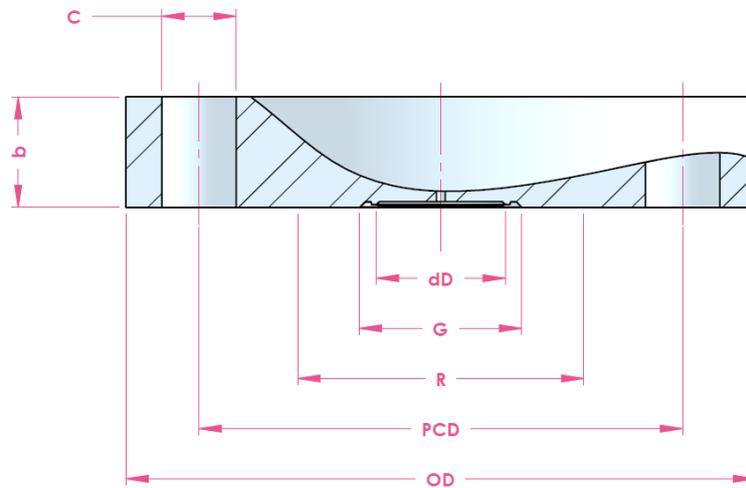

size	rating	OD	b	PCD	C / pcs	dD	R	G	Weight
DN20	PN10-40	105.0	18.0	75.0	14.0 / 4x	23.0	58.0	33.8	1.0
	PN63-100	130.0	22.0	90.0	18.0 / 4x				2.0
DN25	PN10-40	115.0	18.0	85.0	14.0 / 4x	32.0	68.0	41.0	1.0
	PN63-100	140.0	24.0	100.0	18.0 / 4x				2.5
	PN160		28.0		22.0 / 4x				2.7
	PN250	150.0	28.0	105.0	26.0 / 4x				3.6
	PN320	160.0	34.0	115.0					5.2
	PN400	180.0	38.0	130.0	7.5				
DN32	PN10-40	140.0	18.0	100.0	18.0 / 4x	32.0	78.0	41.5	2.0
	PN63-100	155.0	24.0	110.0	22.0 / 4x				3.0
DN40	PN10-40	150.0	18.0		125.0	18.0 / 4x	44.0	88.0	55.4
	PN63-100	170.0	26.0	22.0 / 4x		4.0			
	PN160		28.0	26.0 / 4x		4.4			
	PN250	185.0	34.0			135.0			
	PN320	195.0	38.0	145.0		8.7			
	PN400	220.0	48.0	165.0		14.1			
DN50	PN10-40	165.0	20.0	125.0	18.0 / 4x	57.0	102.0	70.2	3.0
	PN63	180.0	26.0	135.0	22.0 / 4x				4.5
	PN100	195.0	28.0	145.0	26.0 / 4x				6.0
	PN160		30.0						6.4
	PN250	200.0	38.0	150.0	26.0 / 8x				8.2
	PN320	210.0	42.0	160.0					10.7
	PN400	235.0	52.0	180.0	16.7				
DN80	PN10-40	200.0	24.0	160.0	18.0 / 8x	81.0	138.0	93.0	5.0
	PN63	215.0	28.0	170.0	22.0 / 8x				6.5
	PN100	230.0	32.0	180.0	26.0 / 8x				9.0
	PN160	230.0	36.0						10.3
	PN250	255.0	46.0	200.0	30.0 / 8x				16.5
	PN320	275.0	55.0	220.0					25.4
	PN400	305.0	68.0	240.0	33.0 / 8x				38.4
DN100	PN10-16	220.0	20.0	180.0	18.0 / 8x	81.0	158.0	93.0	4.5
	PN25-40	235.0	24.0	190.0	22.0 / 8x		6.5		
	PN63	250.0	30.0	200.0	26.0 / 8x		9.0		
	PN100	265.0	36.0	210.0	30.0 / 8x		13.0		
	PN160		40.0				15.3		
	PN250	300.0	54.0	235.0	33.0 / 8x		27.2		
	PN320	335.0	65.0	265.0	36.0 / 8x		42.5		
PN400	370.0	80.0	295.0	39.0 / 8x	67.3				

All dimensions in mm, weight in kg


Dimensions table: EN 1092-1 type C: Tongue

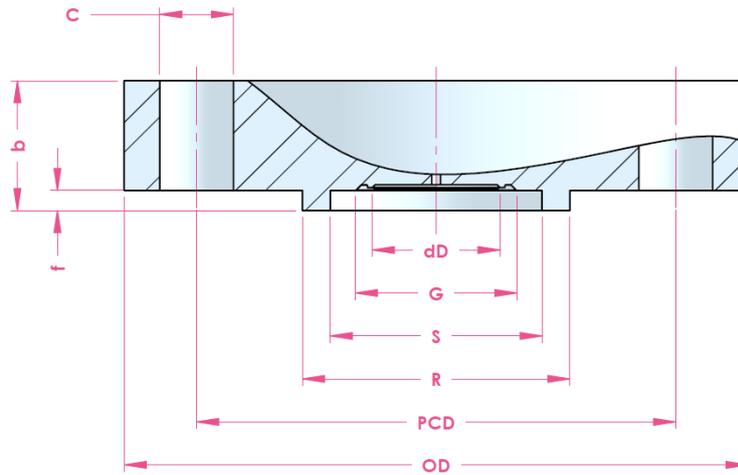

size	rating	OD	b	PCD	C / pcs	dD	S	R	R	f	G	Weight
DN20	PN10-40	105.0	18.0	75.0	14.0 / 4x	23.0	36.0	50.0	58.0	4.5	33.8	1.0
	PN63-100	130.0	22.0	90.0	18.0 / 4x							2.0
DN25	PN10-40	115.0	18.0	85.0	14.0 / 4x	32.0	43.0	57.0	68.0	4.5	41.5	1.0
	PN63-100	140.0	24.0	100.0	18.0 / 4x							2.5
	PN160		24.0	100.0	18.0 / 4x							2.7
	PN250	150.0	28.0	105.0	22.0 / 4x							3.6
	PN320	160.0	34.0	115.0								5.2
	PN400	180.0	38.0	130.0	26.0 / 4x							7.5
DN32	PN10-40	140.0	18.0	100.0	18.0 / 4x	32.0	51.0	65.0	78.0	4.5	41.5	2.0
	PN63-100	155.0	24.0	110.0	22.0 / 4x							3.0
DN40	PN10-40	150.0	18.0	125.0	18.0 / 4x	44.0	61.0	75.0	88.0	4.5	55.4	2.0
	PN63-100	170.0	26.0		22.0 / 4x							4.0
	PN160		28.0	22.0 / 4x	4.4							
	PN250	185.0	34.0	135.0	26.0 / 4x							6.7
	PN320	195.0	38.0	145.0								8.7
	PN400	220.0	48.0	165.0	30.0 / 4x							14.1
DN50	PN10-40	165.0	20.0	125.0	18.0 / 4x	57.0	73.0	87.0	102.0	4.5	70.2	3.0
	PN63	180.0	26.0	135.0	22.0 / 4x							4.5
	PN100	195.0	28.0	145.0	26.0 / 4x							6.0
	PN160		30.0									26.0 / 4x
	PN250	200.0	38.0	150.0	26.0 / 8x							8.2
	PN320	210.0	42.0	160.0								10.7
	PN400	235.0	52.0	180.0								30.0 / 8x
DN80	PN10-40	200.0	24.0	160.0	18.0 / 8x	81.0	106.0	120.0	138.0	4.5	93.0	5.0
	PN63	215.0	28.0	170.0	22.0 / 8x							6.5
	PN100	230.0	32.0	180.0	26.0 / 8x							9.0
	PN160	230.0	36.0									26.0 / 8x
	PN250	255.0	46.0	200.0	30.0 / 8x							16.5
	PN320	275.0	55.0	220.0								25.4
	PN400	305.0	68.0	240.0								33.0 / 8x
DN100	PN10-16	220.0	20.0	180.0	18.0 / 8x	81.0	129.0	149.0	162.0	5.0	93.0	4.5
	PN25-40	235.0	24.0	190.0	22.0 / 8x							6.5
	PN63	250.0	30.0	200.0	26.0 / 8x							9.0
	PN100	265.0	36.0	210.0	30.0 / 8x							13.0
	PN160		40.0									30.0 / 8x
	PN250	300.0	54.0	235.0	33.0 / 8x							27.2
	PN320	335.0	65.0	265.0	36.0 / 8x							42.5
	PN400	370.0	80.0	295.0	39.0 / 8x							67.3

All dimensions in mm, weight in kg


Dimensions table: EN 1092-1 type D: Groove

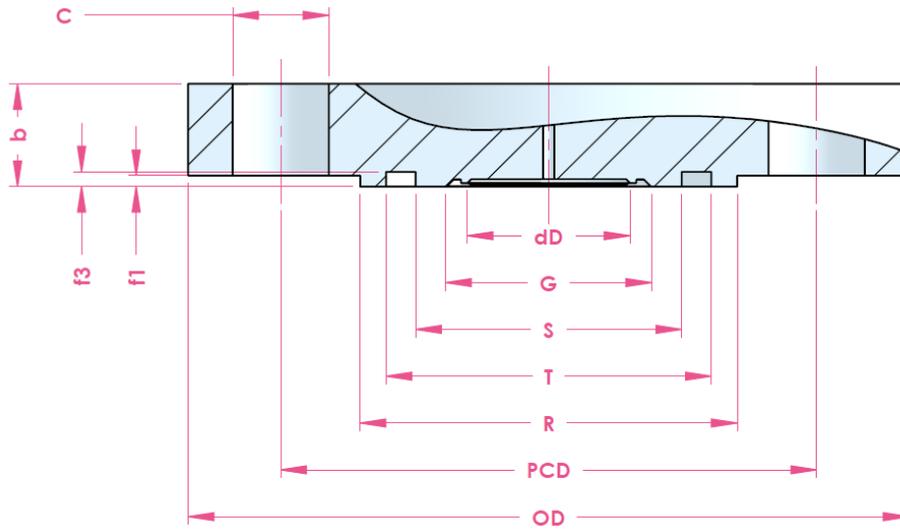

size	rating	OD	b	PCD	C / pcs	dD	S	T	R	f1	f3	G	Weight				
DN20	PN10-40	105.0	18.0	75.0	14.0 / 4x	23.0	35.0	51.0	58.0	2.0	4.0	33.8	1.0				
	PN63-100	130.0	22.0	90.0	18.0 / 4x								2.0				
DN25	PN10-40	115.0	18.0	85.0	14.0 / 4x	32.0	42.0	58.0	68.0	2.0	4.0	41.0	1.0				
	PN63-100	140.0	24.0	100.0	18.0 / 4x								2.5				
	PN160												2.7				
	PN250	150.0	28.0	105.0	22.0 / 4x								3.6				
	PN320	160.0	34.0	115.0	26.0 / 4x								5.2				
	PN400	180.0	38.0	130.0									7.5				
DN32	PN10-40	140.0	18.0	100.0	18.0 / 4x	32.0	50.0	66.0	78.0	2.0	4.0	41.5	2.0				
	PN63-100	155.0	24.0	110.0	22.0 / 4x								3.0				
DN40	PN10-40	150.0	18.0	125.0	18.0 / 4x	44.0	60.0	76.0	88.0	3.0	4.0	55.4	2.0				
	PN63-100	170.0	26.0		22.0 / 4x								4.0				
	PN160		28.0	26.0 / 4x	4.4												
	PN250	185.0	34.0		135.0								6.7				
	PN320	195.0	38.0	145.0	8.7												
	PN400	220.0	48.0	165.0	30.0 / 4x								14.1				
DN50	PN10-40	165.0	20.0	125.0	18.0 / 4x	57.0	72.0	88.0	102.0	3.0	4.0	70.2	3.0				
	PN63	180.0	26.0	135.0	22.0 / 4x								4.5				
	PN100	195.0	28.0	145.0	26.0 / 4x								6.0				
	PN160		30.0		26.0 / 8x								6.4				
	PN250	200.0	38.0	150.0	26.0 / 8x								8.2				
	PN320	210.0	42.0	160.0									10.7				
	PN400	235.0	52.0	180.0	30.0 / 8x								16.7				
DN80	PN10-40	200.0	24.0	160.0	18.0 / 8x	81.0	105.0	121.0	138.0	3.0	4.0	93.0	5.0				
	PN63	215.0	28.0	170.0	22.0 / 8x								6.5				
	PN100	230.0	32.0	180.0	26.0 / 8x								9.0				
	PN160	230.0	36.0		30.0 / 8x								10.3				
	PN250	255.0	46.0	200.0	30.0 / 8x								16.5				
	PN320	275.0	55.0	220.0									25.4				
	PN400	305.0	68.0	240.0	33.0 / 8x								38.4				
DN100	PN10-16	220.0	20.0	180.0	18.0 / 8x	81.0	128.0	150.0	158.0	3.0	4.5	93.0	4.5				
	PN25-40	235.0	24.0	190.0	22.0 / 8x								6.5				
	PN63	250.0	30.0	200.0	26.0 / 8x								9.0				
	PN100	265.0	36.0	210.0	30.0 / 8x								128.0	150.0	162.0	3.0	4.5
	PN160		40.0						15.3								
	PN250	300.0	54.0	235.0	33.0 / 8x				27.2								
	PN320	335.0	65.0	265.0	36.0 / 8x				42.5								
	PN400	370.0	80.0	295.0	39.0 / 8x				67.3								

All dimensions in mm, weight in kg


Dimensions table: EN 1092-1 type E: Spigot

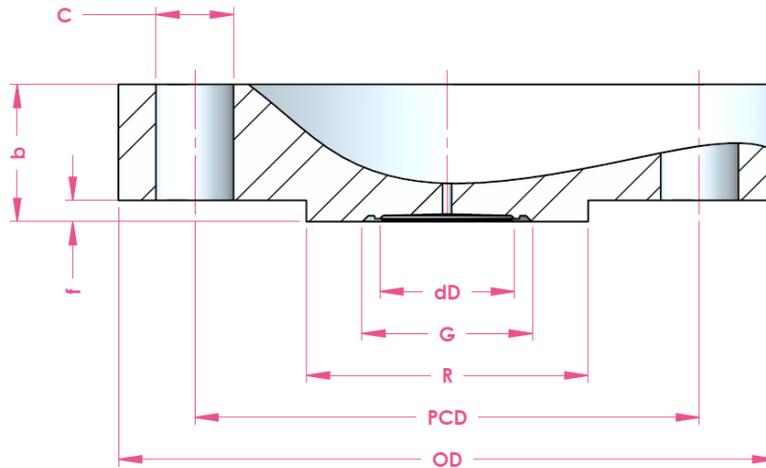

size	rating	OD	b	PCD	C / pcs	dD	R	f	G	Weight
DN20	PN10-40	105.0	18.0	75.0	14.0 / 4x	23.0	50.0	2.0	33.8	1.0
	PN63-100	130.0	22.0	90.0	18.0 / 4x					2.0
DN25	PN10-40	115.0	18.0	85.0	14.0 / 4x	32.0	57.0	2.0	41.0	1.0
	PN63-100	140.0	24.0	100.0	18.0 / 4x					2.5
	PN160		28.0	105.0	22.0 / 4x					2.7
	PN250	150.0	34.0	115.0	26.0 / 4x					3.6
	PN320	160.0	38.0	130.0						5.2
	PN400	180.0	18.0	100.0	18.0 / 4x					7.5
DN32	PN10-40	140.0	18.0	100.0	18.0 / 4x	32.0	65.0	2.0	41.5	2.0
	PN63-100	155.0	24.0	110.0	22.0 / 4x					3.0
DN40	PN10-40	150.0	18.0	125.0	18.0 / 4x	44.0	75.0	3.0	55.4	2.0
	PN63-100	170.0	26.0		22.0 / 4x					4.0
	PN160		28.0	26.0 / 4x	4.4					
	PN250	185.0	34.0		135.0					6.7
	PN320	195.0	38.0	145.0	8.7					
	PN400	220.0	48.0	165.0	30.0 / 4x					14.1
DN50	PN10-40	165.0	20.0	125.0	18.0 / 4x	57.0	87.0	3.0	70.2	3.0
	PN63	180.0	26.0	135.0	22.0 / 4x					4.5
	PN100	195.0	28.0	145.0	26.0 / 4x					6.0
	PN160		30.0		26.0 / 8x					6.4
	PN250	200.0	38.0	150.0						8.2
	PN320	210.0	42.0	160.0	10.7					
	PN400	235.0	52.0	180.0	30.0 / 8x					16.7
DN80	PN10-40	200.0	24.0	160.0	18.0 / 8x	81.0	120.0	3.0	93.0	5.0
	PN63	215.0	28.0	170.0	22.0 / 8x					6.5
	PN100	230.0	32.0	180.0	26.0 / 8x					9.0
	PN160	230.0	36.0							30.0 / 8x
	PN250	255.0	46.0	200.0	16.5					
	PN320	275.0	55.0	220.0	25.4					
	PN400	305.0	68.0	240.0	33.0 / 8x					38.4
DN100	PN10-16	220.0	20.0	180.0	18.0 / 8x	81.0	149.0	3.0	93.0	4.5
	PN25-40	235.0	24.0	190.0	22.0 / 8x					6.5
	PN63	250.0	30.0	200.0	26.0 / 8x					9.0
	PN100	265.0	36.0	210.0	30.0 / 8x					13.0
	PN160		40.0							15.3
	PN250	300.0	54.0	235.0	33.0 / 8x					27.2
	PN320	335.0	65.0	265.0	36.0 / 8x					42.5
PN400	370.0	80.0	295.0	39.0 / 8x	67.3					

All dimensions in mm, weight in kg


Dimensions table: EN 1092-1 type F: Recess

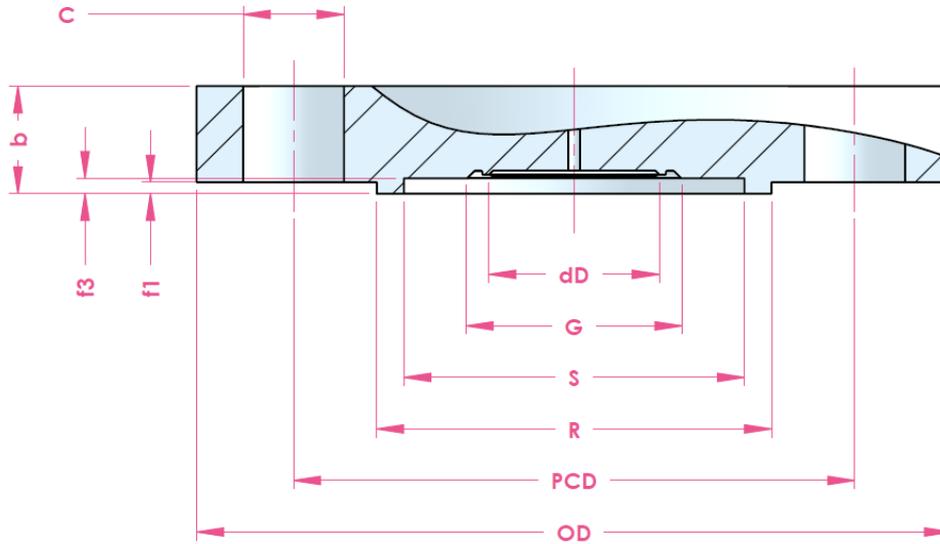

size	rating	OD	b	PCD	C / pcs	dD	T	R	f1	f3	G	Weight
DN20	PN10-40	105.0	18.0	75.0	14.0 / 4x	23.0	51.0	58.0	2.0	4.0	33.8	1.0
	PN63-100	130.0	22.0	90.0	18.0 / 4x							2.0
DN25	PN10-40	115.0	18.0	85.0	14.0 / 4x	32.0	58.0	68.0	2.0	4.0	41.0	1.0
	PN63-100	140.0	24.0	100.0	18.0 / 4x							2.5
	PN160		24.0	100.0	18.0 / 4x							2.7
	PN250	150.0	28.0	105.0	22.0 / 4x							3.6
	PN320	160.0	34.0	115.0								5.2
	PN400	180.0	38.0	130.0	26.0 / 4x							7.5
DN32	PN10-40	140.0	18.0	100.0	18.0 / 4x	32.0	66.0	78.0	2.0	4.0	41.5	2.0
	PN63-100	155.0	24.0	110.0	22.0 / 4x							3.0
DN40	PN10-40	150.0	18.0	110.0	18.0 / 4x	44.0	76.0	88.0	3.0	4.0	55.4	2.0
	PN63-100	170.0	26.0		22.0 / 4x							4.0
	PN160		28.0	22.0 / 4x	4.4							
	PN250	185.0	34.0	135.0	26.0 / 4x							6.7
	PN320	195.0	38.0	145.0								8.7
	PN400	220.0	48.0	165.0	30.0 / 4x							14.1
DN50	PN10-40	165.0	20.0	125.0	18.0 / 4x	57.0	88.0	102.0	3.0	4.0	70.2	3.0
	PN63	180.0	26.0	135.0	22.0 / 4x							4.5
	PN100	195.0	28.0	145.0	26.0 / 4x							6.0
	PN160		30.0									26.0 / 4x
	PN250	200.0	38.0	150.0	26.0 / 8x							8.2
	PN320	210.0	42.0	160.0								10.7
	PN400	235.0	52.0	180.0	30.0 / 8x							16.7
DN80	PN10-40	200.0	24.0	160.0	18.0 / 8x	81.0	121.0	138.0	3.0	4.0	93.0	5.0
	PN63	215.0	28.0	170.0	22.0 / 8x							6.5
	PN100	230.0	32.0	180.0	26.0 / 8x							9.0
	PN160	230.0	36.0									26.0 / 8x
	PN250	255.0	46.0	200.0	30.0 / 8x							16.5
	PN320	275.0	55.0	220.0								25.4
	PN400	305.0	68.0	240.0	33.0 / 8x							38.4
DN100	PN10-16	220.0	20.0	180.0	18.0 / 8x	81.0	158.0	158.0	3.0	4.5	93.0	4.5
	PN25-40	235.0	24.0	190.0	22.0 / 8x							6.5
	PN63	250.0	30.0	200.0	26.0 / 8x							9.0
	PN100	265.0	36.0	210.0	30.0 / 8x							13.0
	PN160		40.0				30.0 / 8x	15.3				
	PN250	300.0	54.0	235.0	33.0 / 8x		27.2					
	PN320	335.0	65.0	265.0	36.0 / 8x		42.5					
	PN400	370.0	80.0	295.0	39.0 / 8x		67.3					

All dimensions in mm, weight in kg


Dimensions table: JIS 2220 RF

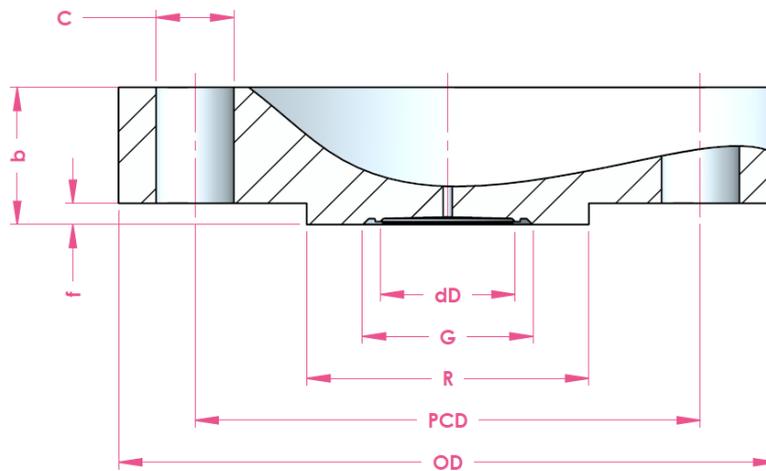

Size	rating	OD	dD	b	PCD	C / pcs	R	f	G	Weight			
25	10K	125.0	32.0	15.0	90.0	19.0 / 4x	67.0	1.0	40.0	1.2			
	16K			17.0				1.0		1.3			
	20K			17.0				1.0		1.4			
32	10K	135.0	44.0	18.0	100.0		19.0 / 4x	76.0	2.0	50.6	1.7		
	16K			20.0					2.0		1.7		
	20K			20.0					2.0		1.7		
40	10K	140.0	44.0	18.0	105.0			19.0 / 4x	81.0	2.0	55.4	1.8	
	16K			20.0						2.0		1.8	
	20K			20.0						2.0		1.9	
50	10K	155.0	57.0	18.0	120.0				19.0 / 8x	96.0	2.0	68.5	2.2
	16K			20.0							2.0		2.2
	20K			20.0							2.0		2.2
80	10K	185.0	81.0	20.0	150.0	19.0 / 8x				126.0	2.0	93.0	3.5
	16K	200.0		22.0	160.0						2.0		4.4
	20K	200.0		24.0	160.0						2.0		4.6
90	10K	195.0	81.0	20.0	170.0		19.0 / 8x			136.0	2.0	93.0	3.9
	16K	210.0		22.0	170.0						2.0		4.9
	20K	210.0		26.0	170.0						2.0		5.7
100	10K	225.0	81.0	20.0	175.0			19.0 / 8x		151.0	2.0	93.0	4.6
	16K			24.0	185.0						2.0		6.3
	20K			24.0	185.0						2.0		6.6

All dimensions in mm, weight in kg


Dimensions table: API 10423 – Type 6BX

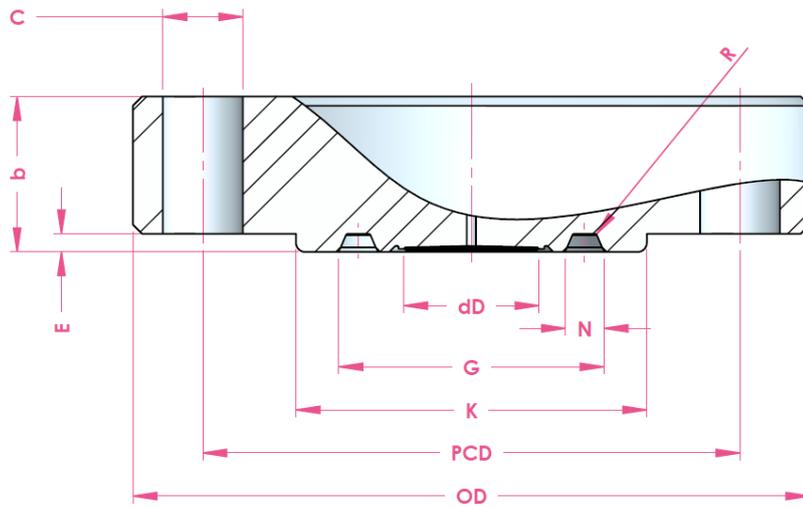

size	rating	OD	b	PCD	C / pcs	dD	K	E	N	G	ring	Weight
1-13/16"	69MPa	185.0	42.1	146.1	23.0 / 8x	32.0	105.0	5.6	11.8	77.7	BX-151	9.0
	103,5MPa	210.0	45.3	160.3	26.0 / 8x		106.0					12.5
	138MPa	255.0	63.5	203.2	29.0 / 8x		117.0					25.5
2-1/16"	69MPa	200.0	44.1	158.8	23.0 / 8x	44.0	111.0	5.9	12.7	86.2	BX-152	11.0
	103,5MPa	220.0	50.8	174.6	26.0 / 8x		114.0					15.2
	138MPa	285.0	71.5	230.2	32.0 / 8x		132.0					35.7
2-9/16"	69MPa	230.0	51.2	184.2	26.0 / 8x	57.0	132.0	6.8	14.1	102.7	BX-153	16.8
	103,5MPa	255.0	57.2	200.0	29.0 / 8x		133.0					23.2
	138MPa	325.0	79.4	261.9	35.0 / 8x		151.0					52.3
3-1/16"	69MPa	270.0	58.4	215.9	29.0 / 8x	72.0	152.0	7.5	15.4	119.0	BX-154	27.5
	103,5MPa	290.0	64.3	230.2	32.0 / 8x		154.0					33.6
	138MPa	355.0	85.8	287.3	39.0 / 8x		171.0					65.4

All dimensions in mm, weight in kg


Dimension s table: API 6A 10423 – Type 6B

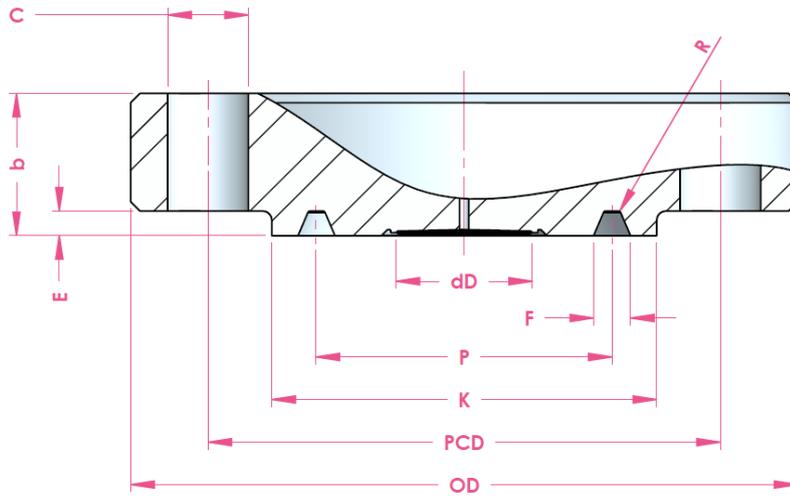

size	rating	OD	b	PCD	C / pcs	dD	K	E	F	P	ring	Weight
2-1/16"	13.8MPa	165.0	33.4	127.0	20.0 / 8x	44.0	108.0	7.9	11.9	82.6	R or RX-23	5.6
	20.7MPa	215.0	46.1	165.1	26.0 / 8x		124.0			95.2	R or RX-24	13.3
	34.5MPa						101.6			R or RX-26	13.3	
2-9/16"	13.8MPa	190.0	36.6	149.2	23.0 / 8x	72.0	127.0	7.9	11.9	101.6	R or RX-26	8.1
	20.7MPa	245.0	49.3	190.5	29.0 / 8x		137.0			107.9	R or RX-27	18.4
	34.5MPa	245.0	49.3	190.5			123.8			R or RX-31	16.5	
3-1/8"	13.8MPa	210.0	39.7	168.3	23.0 / 8x	81.0	146.0	7.9	11.9	123.8	R or RX-31	10.8
	20.7Mpa	240.0	46.1	190.5	26.0 / 8x		156.0			136.5	R or RX-35	16.5
	34.5MPa	265.0	55.6	203.2	32.0 / 8x		168.0			136.5	R or RX-35	24.2

All dimensions in mm, weight in kg


Dimensions table: GOST 33259 type B

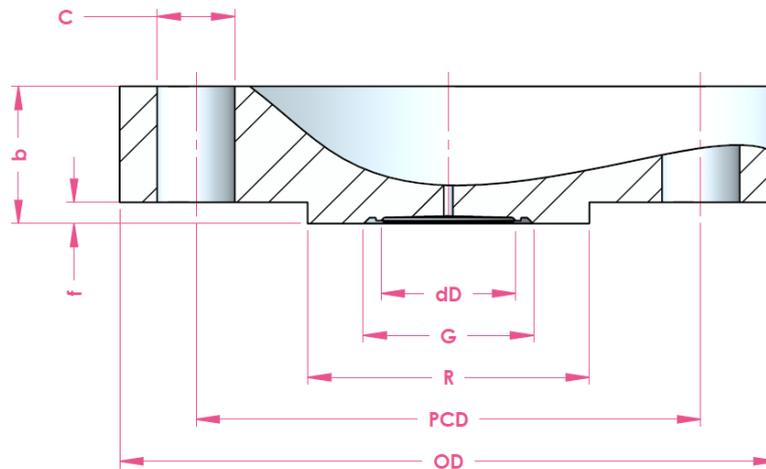

size	rating	OD	b	PCD	C / pcs	dD	R	f	G	Weight
DN20	PN10-40	105.0	18.0	75.0	14.0 / 4x	23.0	58.0	2.0	33.8	1.0
	PN63-100	130.0	22.0	90.0	18.0 / 4x					2.0
DN25	PN10-40	115.0	18.0	85.0	14.0 / 4x	32.0	68.0	2.0	41.0	1.0
	PN63-100	140.0	24.0	100.0	18.0 / 4x					2.5
	PN160									2.7
	PN250	150.0	28.0	105.0	22.0 / 4x					3.6
DN32	PN10-40	140.0	18.0	100.0	18.0 / 4x	32.0	78.0	2.0	41.5	2.0
	PN63-100	155.0	24.0	110.0	22.0 / 4x					3.0
DN40	PN10-40	150.0	18.0	110.0	18.0 / 4x	44.0	88.0	3.0	55.4	2.0
	PN63-100	170.0	26.0		22.0 / 4x					4.0
	PN160		28.0	125.0	22.0 / 4x					4.4
	PN250	185.0	34.0	135.0	26.0 / 4x					6.7
DN50	PN10-40	165.0	20.0	125.0	18.0 / 4x	57.0	102.0	3.0	70.2	3.0
	PN63	180.0	26.0	135.0	22.0 / 4x					4.5
	PN100	195.0	28.0	145.0	26.0 / 4x					6.0
	PN160		30.0		26.0 / 8x					6.4
	PN250	200.0	38.0	150.0	26.0 / 8x					8.2
DN80	PN10-40	215.0	24.0	160.0	18.0 / 8x	81.0	138.0	3.0	93.0	5.0
	PN63		28.0	170.0	22.0 / 8x					6.5
	PN100	230.0	32.0	180.0	26.0 / 8x					9.0
	PN160	230.0	36.0		30.0 / 8x					10.3
	PN250	255.0	46.0	200.0	30.0 / 8x					16.5
DN100	PN10-16	220.0	20.0	180.0	18.0 / 8x	81.0	158.0	3.0	93.0	4.5
	PN25-40	235.0	24.0	190.0	22.0 / 8x					6.5
	PN63	250.0	30.0	200.0	26.0 / 8x					9.0
	PN100	265.0	36.0	210.0	30.0 / 8x					13.0
	PN160		40.0		30.0 / 8x					15.3
	PN250	300.0	54.0	235.0	33.0 / 8x					27.2

All dimensions in mm, weight in kg

Dimensions table: GOST 33259 type J

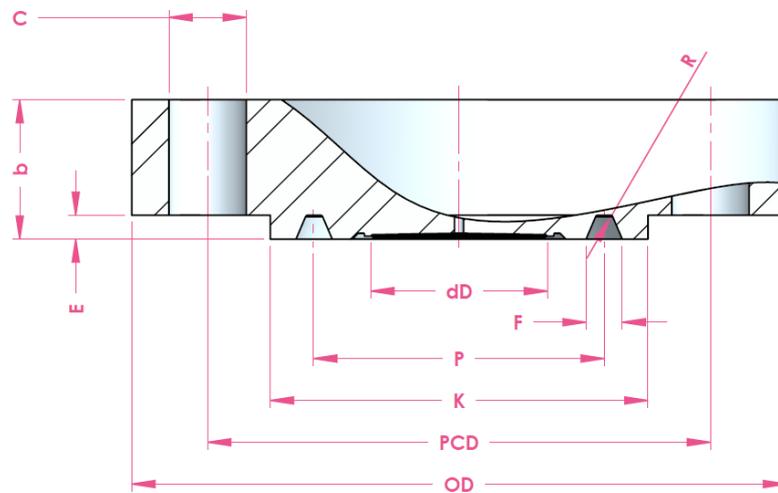

size	rating	OD	b	PCD	C / pcs	K	P	E	F	dD	Weight
DN20	PN63	125.0	20.0	90.0	18.0 / 4x	58	45	6.5	9	23.0	2.0
	PN100-160		22.0								2.2
	PN200	28.0	2.3								
DN25	PN63	135.0	22.0	100.0	18.0 / 4x	68.0	50.0	6.5	9	32.0	2.5
	PN100-160		24.0								2.6
	PN200	30.0	2.7								
DN32	PN63	150.0	23.0	110.0	22.0 / 4x	78.0	65.0	6.5	9	44.0	3.0
	PN100		24.0								3.1
	PN160	160.0	32.0	115.0	26.0 / 4x						3.6
	PN200		24.0	4.0							
DN40	PN63	165.0	24.0	125.0	22.0 / 4x	88.0	75.0	6.5	9	57.0	4.2
	PN100		26.0								4.4
	PN160	170.0	28.0	124.0	26.0 / 4x						6.7
	PN200		34.0	124.0	26.0 / 4x						91.0
DN50	PN63	180.0	26.0	135.0	22.0 / 4x	102.0	85.0	8.0	12.0	81.0	4.5
	PN100	195.0	28.0	145.0	26.0 / 4x	115.0	95.0				6.0
	PN160		30.0								6.4
	PN200	200.0	40.0	160.0	26.0 / 8x	129.0	8.2				
DN80	PN63	210.0	30.0	170.0	22.0 / 8x	133.0	115.0	8.0	12.0	81.0	6.5
	PN100	230.0	34.0	180.0	26.0 / 8x	150.0					9.0
	PN160		36.0								10.3
	PN200	290.0	54.0	230.0	33.0 / 8x	190.0					16.5
DN100	PN63	250.0	32.0	200.0	26.0 / 8x	170.0	145.0	8.0	12.0	81.0	9.0
	PN100	265.0	38.0	210.0	30.0 / 8x	175.0					13.0
	PN160		40.0								15.3
	PN200	360.0	66.0	235.0	39.0 / 8x	245.0					190.0

All dimensions in mm, weight in kg

Product code ASME B16.5 BF seals

Code	
Example code:	BF A 08 A1 RF CATA S316 S363 C25H
Standard	
ASME B16.5	A
Size	
1"	02
1.5"	04
2"	05
3"	08
4"	10
Class	
cl. 150	A1
cl. 300	A2
cl. 400 ^{*1}	A3
cl. 600	A4
cl. 900 ^{*2}	A5
cl. 1500	A6
cl. 2500	A7
Facing²	
Raised Face ◀	RF
Ring Joint Face	RJF
Capillary connection	
Capillary top (axial) ◀	CATA
Capillary side (radial)	CASR
Material	
AISI 316(L)	S316
AISI 316(L) with Alloy C276 diaphragm ^{*3}	S316N
AISI 304L	S304
AISI 310 MoLn	S310
AISI 316 UG	U316
AISI 321	S321
AISI 904(L)	S904
Alloy 20	A020
Alloy 400	A400
Alloy 600	A600
Alloy 625	A625
Alloy 825	A825
Alloy B2	AB02
Alloy C-22	AC22
Alloy C-276	A276
Duplex F44	DF44
Duplex F51/F60	DF51
Duplex F53	DF53
Duplex F55	DF55
Nickel 201	N201
Titanium Gr. 2	TG02
Zirconium 702	Z702
Options	
See tables 1, 2, 3 ◀	

*1: For size ≥3"

*2: Other facings than RF/ RJF, fill in facing code from table 1.

*3: Dissimilar materials as wetted parts are outside warranty on process compatibility.

Product code EN 1092-1 BF seals

Code	
Example code:	BF E 27 D4 B1 CATA S316 S363 C25H
Standard	
EN 1092-1	E
Size	
DN25	24
DN40	26
DN50	27
DN80	29
DN100	30
Class	
PN 10-16 ^{*1}	D2
PN 25-40 ^{*1}	D3
PN 10-40	D4
PN 63	D5
PN 100	D6
PN 250	D7
PN 400	D8
Facing²	
Raised Face ◀	B1
Capillary connection	
Capillary top (axial) ◀	CATA
Capillary side (radial)	CASR
Material	
AISI 316(L)	S316
AISI 316(L) with Alloy C276 diaphragm ^{*3}	S316N
AISI 304L	S304
AISI 310 MoLn	S310
AISI 316 UG	U316
AISI 321	S321
AISI 904(L)	S904
Alloy 20	A020
Alloy 400	A400
Alloy 600	A600
Alloy 625	A625
Alloy 825	A825
Alloy B2	AB02
Alloy C-22	AC22
Alloy C-276	A276
Duplex F44	DF44
Duplex F51/F60	DF51
Duplex F53	DF53
Duplex F55	DF55
Nickel 201	N201
Titanium Gr. 2	TG02
Zirconium 702	Z702
Options	
See tables 1, 2, 3 ◀	

*1: For size ≥DN100

*2: Other facings than B1, fill in facing code from table 1.

*3: Dissimilar materials as wetted parts are outside warranty on process compatibility.

Product code JIS B2220 BF seals

Code	
Example code:	BF J 27 J1 RF CATA S316 S363 C25H
Standard	JIS B2220 J
Size	
DN25	24
DN40	26
DN50	27
DN80	29
DN90	31
DN100	30
Class	
10k	J1
16K	J2
25K	J3
Facing	
Raised Face ◀	RF
Capillary connection	
Capillary top (axial) ◀	CATA
Capillary side (radial)	CASR
Material	
AISI 316(L)	S316
Options	
See tables 1, 2, 3 ◀	

*1: For other materials contact sales department

Product code API 10423 BF seals

Code	
Example code:	BF P 32 P1 6B-RJF CATA S316 S363 C25H
Standard	
API 10423	P
Size	
1-13/16"	32
2-1/16"	33
2-9/16"	34
3-1/8"	35
Class	
13.8MPa (6B)	P1
20.7MPa (6B)	P2
34.5MPa (6B)	P3
69MPa (6BX)	P4
103,5MPa (6BX)	P5
138MPa (6BX)	P6
Facing	
Ring Joint Type 6B ◀	6B-RJF
Ring Joint Type 6BX ◀	6BX-RJF
Capillary connection	
Capillary top (axial) ◀	CATA
Capillary side (radial)	CASR
Material	
AISI 316(L)	S316
AISI 316(L) with Alloy C276 diaphragm*1	S316N
AISI 304L	S304
AISI 310 MoLn	S310
AISI 316 UG	U316
AISI 321	S321
AISI 904(L)	S904
Alloy 20	A020
Alloy 400	A400
Alloy 600	A600
Alloy 625	A625
Alloy 825	A825
Alloy B2	AB02
Alloy C-22	AC22
Alloy C-276	A276
Duplex F44	DF44
Duplex F51/F60	DF51
Duplex F53	DF53
Duplex F55	DF55
Options	
See tables 1, 2, 3 ◀	

*1: Dissimilar materials as wetted parts are outside warranty on process compatibility

Product code GOST 33259 BF seals

Code	
Example code:	BF G3 27 D4 B CATA S316 S363 C25H
Standard	
GOST 33259	G3
Size	
DN20	23
DN25	24
DN32	25
DN40	26
DN50	27
DN80	29
DN100	30
Class	
PN 10-40	D4
PN 63	D5
PN 100	D6
PN 160	D10
PN 250	D7
Facing	
Raised Face ◀	B
Ring Joint Type	J
Capillary connection	
Capillary top (axial) ◀	CATA
Capillary side (radial)	CASR
Material*1	
AISI 316(L)	S316
Options	
See tables 1, 2, 3 ◀	

*1: For other materials contact sales department

Table 1: Additional Facing

ASME B16.5

Description	code
Large Male Face	LMF
Small Male Face	SMF
Flat Face	FF
Large Tongue Face	LTF
Small Tongue Face	STF
Large Groove Face	LGF
Small Groove Face	SGF
Large Female Face	LFF
Small Female Face	SFF

EN 1092-1

Description	code
Flat Face	A
Raised face (smooth finish)	B2
Tongue	C
Groove	D
Spigot	E
Recess	F

For the Groove and Tongue Facings the instrument and process and side are the opposites
(eg Instrument side is LTF then Process side is LGF)

Table 2: Options

Option (start options with X_)	code
Cleaned from Oil and Grease	_K1
NACE ISO 15156 (MR 01 75)	_N75
3.1 material certificate	_IC31
2.1 Pressure leak test certificate standard pressure ^{*1}	_LTPS
2.1 Pressure leak test certificate acc PED 2014/68/EU ^{*1}	_LTCE
2.1 Penetrant test certificate ^{*2}	_PT1
2.2 Positive Material Identification	_PMI
2.2 Welding documents (WPS/PQR) ^{*2}	_WPS

^{*1}: For fitted and welded accessory
^{*2}: Only for welded accessory

Table 3: Options

Option (start options with X_)	code
PTFE Coating	CPTF
PFA Coating	CPFA
Halar Coating	CHAL
FEP Coating	CFEP
Gold coating diaphragm 25 µm	C25H
Gold coating diaphragm 40 µm	C40H
Gold coating all wetted parts 25 µm	C25W
Gold coating all wetted parts 40 µm	C40W

Change log

Date	Change
30-3-2020	1.5" cl 2500 dimension "P" in RJF changed.
15-4-2020	New dimension tables added for ASME B16.5 facing STF, LTF, LGF, SGF, LMF, FF
	New dimension tables added for EN 1092-1 type B2, A, C, D, E, F.
	Coding tables for all flange standards
28-5-2020	DN80 PN10-40 size D changed for all a=facings
7-9-2020	LGF facing table sizes S and T are revised.

Holland – Romania – India – Thailand – Dubai – USA

To our knowledge, the information contained herein is accurate as of the date of this document. However neither Badotherm, nor its affiliates makes any warranty, express or limited, or accepts any liability in connection with this information or its use. This information is for technical skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other product. The user alone finally determines suitability of any information or material in contemplated use, the manner of use and whether any patents are infringed. This information gives typical properties only. Badotherm reserves the right to make changes to the specifications any materials without prior notice. The latest version of the datasheet can be found on www.badotherm.com.

© 2015 Badotherm, all rights reserved. Trademarks and/or other products referenced herein are either trademarks or registered trademarks of Badotherm.